


Baek 650WDR

PIXIM Dome Camera

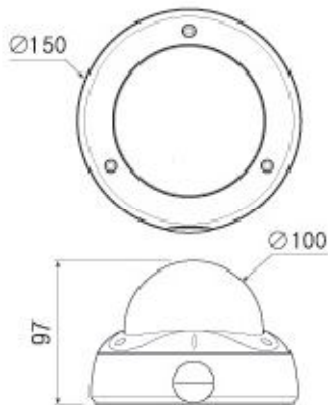

Dimensions in mm

Important Features

- Pixim 1/3" High-Resolution ORCA Sensor
- Good Colour Quality
- Resolution 540TVL
- Industry-best WDR Performance
- Minimum ill. Low 0.08 Lux
- 2.9mm~10mm Vari-Focal DC Auto Iris Lens
- Motion Detection
- Auto White Balance, OSD
- Day & Night(digital change)
- Privacy Zone masking
- 3-Axis Rotation
- Waterproof (IP66)

Technical Document

Technical Specification

Image Pick-up Device	1/3" Pixim DPS Orca
Effective Pixels	720 x 540
Horizontal Resolution	Max 540TVL, 480 TVL Normal
Scanning Frequency	15,734 Hz(H) 59.944 (V)
Signal System	NTSC/PAL
Minimum Illumination	Colour: 0.4 Lux @F:12 Sense-up 32x 0.08 Lux
Day & Night	D&N Function by Digital Change: Auto/Off
Sharpness	Level 1~16
White Balance	Auto/AWB/Manual
Back Light	On/Off
DSS	Off/2 fields~32 fields
DNR	ON / OFF
AGC	Low/Mode/High
Wide Dynamic Range	Max 120dB/ 17 bit
Privacy Zone masking	6 Zones
Setup Place	Indoor/Outdoor/Fluorescent/Custom/Lobby
Camera ID	On/Off
SN Ratio	More than 50dB
Video Output	Composite video Output 75Ω terminated
OSD	Built in
Operating Temperature	-10° to 50°
Dimension	150 x 97 (Dia x H)
Weight	~1.2Kg
Power Consumption	Max 2.5W
Power Supply	DC 12V±10%

*Important Note- The illumination range assumes ideal conditions (i.e. mounted height ETC...)